



WATER MAX 130°C - 100 bar

PAINTED STEEL



In accordance with directive Atex
94/9 IIB 2 GD c T4 T135 °C X


FIXED



Article

8330.200
8330.201

SWIVELLING



Article

-
-

Supplied with:

- hoses in black synthetic rubber
- zinc plated steel couplings
- AISI 304 stainless steel swivel joint
- "viton" seals



Hose supplied	Connection	
	inlet	outlet
without hose	F1/2"G	F 3/8"-1/2"G
12m - 3/8" (995.313)	F1/2"G	M3/8"G

S. 330

S. 390

8390.200
8390.202

8380.200
8380.202

without hose
17m - 3/8" (995.318)

F1/2"G
F1/2"G

F3/8"-1/2"G
M3/8"G

S. 430

8430.200
8430.201
8430.202

8420.200
8420.201
8420.202

without hose
10m - 1/2" (996.311)
15m - 1/2" (996.316)

F1/2"G
F1/2"G
F1/2"G

F1/2"G
M1/2"G
M1/2"G

for ABS hose reels Series 430 see page 152

S. 530

8530.200
8530.201

8520.200
8520.201

without hose
20m - 1/2" (996.321)

F1/2"G
F1/2"G

F1/2"G
M1/2"G

S. 540

8540.200
8540.202
8540.203

8550.200
8550.202
8550.203

without hose
20m - 3/4" (997.320)
15m - 1" (998.315)

F1"G
F1"G
F1"G

F1"G
M3/4"G
M1"G

S. 560

8560.200
8560.205

-
-

without hose
30m - 1" (998.330)

F1"G
F1"G

F1"G
M1"G


FIXED HOSE REELS INSTALLATION

The quick coupling support is equipped with 4 slot holes that allow an easy and safe installation of the hose reel.

The **template** supplied facilitates drilling of the holes and there fore hose reel fixing.

SWIVELLING HOSE REELS INSTALLATION

The **quick coupling swivelling support** facilitates hose reel installation and enables **55° rotation** to the right or left or locking in **fixed positioned at 0°** by means of clamping with two screws.

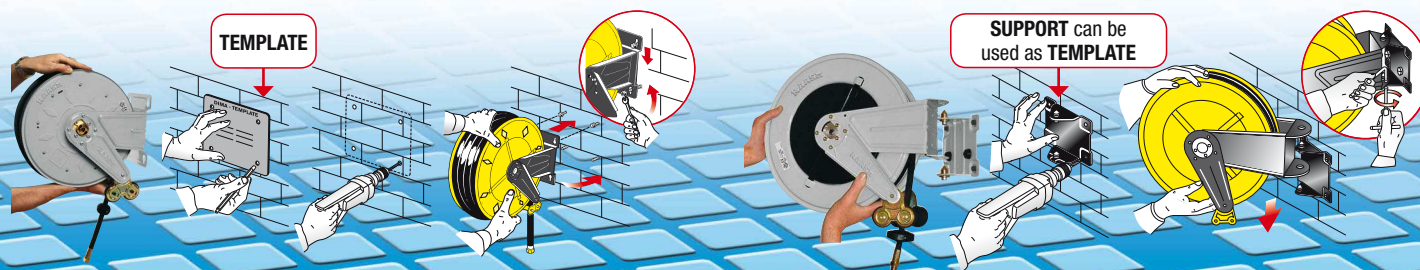



WATER MAX 130°C - 100 bar

STAINLESS STEEL



In accordance with directive Atex
94/9 IIB 2 GD c T4 T135 °C X


FIXED



Article

8332.400
8332.201
8333.202

SWIVELLING



Article

-
-
-

Supplied with:

- hoses in black synthetic rubber
- zinc plated steel couplings
- AISI 304 stainless steel swivel joint
- "viton" seals



S. 330
hygienic hose

S. 390
hygienic hose

S. 430
hygienic hose

S. 530
hygienic hose

S. 540
hygienic hose

S. 560

8392.200
8392.202
8393.201

8382.200
8382.202
8383.201

8434.200
8432.201
8432.202
8433.202

8424.200
8422.201
8422.202
8423.202

for ABS hose reels Series 430 see page 153

8534.200
8532.201
8533.202

8524.200
8522.201
8523.202

8544.200
8542.202
8542.203
8543.202

8554.200
8552.202
8552.203
8553.202

8564.200
8562.205

-
-

Hose supplied	Connection	
	inlet	outlet
without hose	F1/2"G	F 3/8"-1/2"G
12m - 3/8" (995.313)	F1/2"G	M3/8"G
12m - 3/8" (995.412)	F1/2"G	M3/8"G

without hose	F1/2"G	F3/8"-1/2"G
17m - 3/8" (995.318)	F1/2"G	M3/8"G
12m - 3/8" (995.412)	F1/2"G	M3/8"G


without hose	F1/2"G	F1/2"G
10m - 1/2" (996.311)	F1/2"G	M1/2"G
15m - 1/2" (996.316)	F1/2"G	M1/2"G
15m - 1/2" (996.415)	F1/2"G	M1/2"G

without hose	F1/2"G	F1/2"G
20m - 1/2" (996.321)	F1/2"G	M1/2"G
25m - 1/2" (996.425)	F1/2"G	M1/2"G

without hose	F1"G	F1"G
20m - 3/4" (997.320)	F1"G	M3/4"G
15m - 1" (998.315)	F1"G	M1"G
20m - 3/4" (997.420)	F1"G	M3/4"G


without hose	F1"G	F1"G
30m - 1" (998.330)	F1"G	M1"G

FIXED OVERALL DIMENSIONS

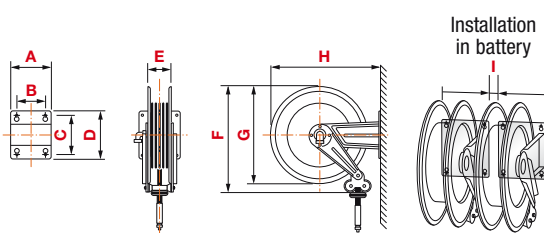

Art.	A	B	C	D	E	F	G	H	I	1-m ³	Kg *
S. 330	186	140	196	226	110	355	350	365	20	0,045	from 8 to 13
S. 390	186	140	196	226	110	400	390	410	20	0,068	from 11 to 18
S. 430	186	140	196	226	115	460	420	460	20	0,098	from 14 to 24
S. 530	203	153	220	258	115	550	510	560	20	0,120	from 19 to 42
S. 540	300	218	228	268	190	550	510	573	0	0,175	from 24 to 40
S. 560	488	399	238	272	368	550	510	578	0	0,310	from 30 to 80

SWIVELLING OVERALL DIMENSIONS

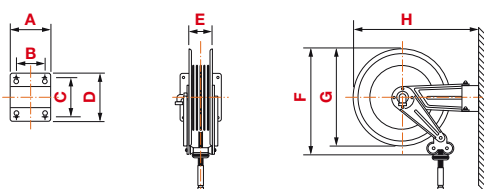

Art.	A	B	C	D	E	F	G	H	1-m ³	Kg
S. 380	184	146	106	144	110	400	390	484	0,098	from 12 to 19
S. 420	208	162	118	164	115	460	420	541	0,098	from 15 to 25
S. 520	228	182	154	200	115	560	510	642	0,120	from 20 to 43
S. 550	300	218	226	268	190	560	510	702	0,175	from 25 to 41

* The list shows min and max weight for each series: min weight refers to version without hose, max weight refers to heaviest version which depends on hose length and diameter.